

11-06-00

A

11/03/00



1c825 U.S. PTO

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

CERTIFICATE OF EXPRESS MAILING

I hereby certify that this paper and the documents and/or fees referred to as
therein are being deposited with the United States Postal Service
on November 3, 2000 in an envelope as "Express Mail Post Office to
Addressee" service under 37 CFR § 1.10, Mailing Label Number
EL580854097US, addressed to the Assistant Commissioner for Patents,
Washington, DC 20231.

Mandy Franklin
Mandy Franklin

Attorney Docket No.: DANAP004

First Named Inventor: SRINIVAS



1c825 U.S. PTO

09/06/96

11/03/00

UTILITY PATENT APPLICATION TRANSMITTAL (37 CFR. § 1.53(b))

(Regular application claiming priority of a provisional)

Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

Sir: This is a request for filing a patent application under 37 CFR. § 1.53(b) in the name of inventors:
Sampath Srinivas, Theron Tock

For: **DYNAMIC TOOLBAR FOR MARKUP LANGUAGE DOCUMENT**

Priority of U.S. Provisional Application No. 60/235,513 filed on September 26, 2000 is claimed
under 35 U.S.C. § 119(e).

Application Elements:

- ☒ **50** Pages of Specification, Claims and Abstract
- ☒ **19** Sheets of informal Drawings
- ☒ Combined Declaration and Power of Attorney
- ☐ Separate Declaration

Accompanying Application Parts:

- ☒ Assignment and Assignment Recordation Cover Sheet (recording fee of \$40.00 enclosed)
- ☐ Separate Power of Attorney by Assignee
- ☐ 37 CFR 3.73(b) Statement by Assignee
- ☐ Information Disclosure Statement with Form PTO-1449
 - ☐ Copies of IDS Citations
- ☐ Preliminary Amendment
- ☒ Return Receipt Postcard
- ☒ Small Entity Statement(s)

☐ Other:

Fee Calculation (37 CFR § 1.16)

	(Col. 1) Total Claims		(Col. 2) Claims	(Col. 3) Present Extra	Rate	Additional Fee
TOTAL	21	MINUS	20	= 01	x 18	18.00
INDEP.	05	MINUS	3	= 02	x 80	160.00
[] First presentation of multiple dependent claim					\$270	
Basic Filing Fee under 37 C.F.R. §1.16(a)					\$710	710.00
TOTAL						888.00
SMALL ENTITY 50% FILING FEE REDUCTION (if applicable)						444.00

☒ Check No. 9468 in the amount of \$484.00 is enclosed.

☒ The Commissioner is authorized to charge any fees beyond the amount enclosed which may be required, or to credit any overpayment, to Deposit Account No. 500388 (Order No. DANAP004).

General Authorization for Petition for Extension of Time (37 CFR §1.136)

☒ Applicants hereby make and generally authorize any Petitions for Extensions of Time as may be needed for any subsequent filings. The Commissioner is also authorized to charge any extension fees under 37 CFR §1.17 as may be needed to Deposit Account No. 500388 (Order No. DANAP004).

☒ Please send correspondence to the following address:

Customer Number 022434
BEYER WEAVER & THOMAS, LLP
P.O. Box 778
Berkeley, CA 94704-0778
Telephone (650) 961-8300
Fax (650) 961-8301



Date: 11/3/00

C. Douglass Thomas

C. Douglass Thomas
Registration No. 32,947

Applicant/Patentee: Srinivas et al.
Application or Patent No. Not Yet Assigned Atty Docket # DANAP004
Filed or Issued: Herewith

VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL ENTITY STATUS
37 CFR 1.9(f) and 1.27(c)--SMALL BUSINESS CONCERN

I hereby declare that I am

- ☐ the owner of the small business concern identified below;
☐ an official empowered to act on behalf of the small business concern identified below;

NAME OF CONCERN: Danastreet Internet, Inc.
ADDRESS: 3443 Georgetown Place, Santa Clara, CA 95051

I hereby declare that the above identified small business concern qualifies as a small business concern as defined in 13 CFR 121.3-18, and reproduced in 37 CFR 1.9(d), for purposes of paying reduced fees under 41(a) and (b) of Title 35, U.S. Code, in that the number of employees of the concern, including those of its affiliates, does not exceed 500 persons. For purposes of this statement, (1) the number of employees of the business concern is the average over the previous fiscal year of the concern of the persons employed on a full-time, part-time or temporary basis during each of the pay periods of the fiscal year, and (2) concerns are affiliates of each other when either, directly or indirectly, one concern controls or has the power to control the other, or a third party or parties controls or has the power to control both.

I hereby declare that rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the invention entitled: DYNAMIC TOOLBAR FOR MARKUP LANGUAGE DOCUMENT, by inventor(s) Sampath Srinivas and Theron Tock, described in


- ☒ the specification filed herewith.
☐ Application No. _____ filed _____
☐ patent # _____ issued _____

If the rights held by the above-identified small business concern are not exclusive, each individual, concern or organization having rights to the invention is listed below* and no rights to the invention are held by any person, other than the inventor, who could not qualify as a small business concern under 37 CFR 1.9(d) or by any concern which would not qualify as a small business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(e).
*Note: separate verified statements are required from each named person, concern or organization having rights to the invention averring to their status as small entities. (37 CFR 1.27)

Name: _____
Address: _____
☐ individual ☐ small business concern ☐ nonprofit organization

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b)).

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further, that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 1001 of Title 18 of the U.S. Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

NAME OF PERSON SIGNING: Sampath Srinivas
TITLE IN ORGANIZATION: CEO
SIGNATURE  DATE 03 NOV 2000

PATENT APPLICATION

DYNAMIC TOOLBAR FOR MARKUP LANGUAGE DOCUMENT

Inventor(s): 1. Sampath Srinivas
3443 Georgetown Place
Santa Clara, CA 95051
Citizenship: USA

2. Theron Tock
620 Palo Alto Ave.
Mountain View, CA 94041
Citizenship: USA

Assignee: Danastreet Internet, Inc.

DYNAMIC TOOLBAR FOR MARKUP LANGUAGE DOCUMENT

CROSS-REFERENCE TO RELATED APPLICATION

5 This application claims the benefit of U.S. Provisional Patent Application No. 60/235,513, filed September 26, 2000, and entitled "ENHANCED BROWSING ENVIRONMENT", and which is hereby incorporated by reference herein. This application is also related to concurrently filed U.S. Patent Application Nos. X1, X2, and X3.

BACKGROUND OF THE INVENTION

1. Field of the Invention

10 The present invention relates to client-server computing and, more particularly, to client-server computing for accessing resources over a network.

2. Description of the Related Art

15 Network browsers (browser applications), such as Netscape Navigator or Microsoft Explorer, allow users of client machines to request and retrieve resources from remotely located server machines via the Internet. These network browsers can display or render HyperText Markup Language (HTML) documents provided by the remotely located server machines. Additionally, browsers are able to execute script programs embedded in the HTML documents to provide some local functionality. More recent network browsers support a searchable history list, a favorites or bookmarks list, etc.

25 Although traditional network browsers are very useful, there is a need to provide users of network browsers with access to increased functionality and services. Generally, increased functionality and services can be provided to network browsers by (i) functionality built into network browsers, (ii) services provided by plug-in software, or (iii) web based services.

Functionality can be built into network browsers. However, because network browsers are designed for general, local use, only general functions get incorporated into network browsers. Examples of built-in functionality include a searchable history list, a favorites or bookmarks list, etc. which are provided in more recent network browsers.

Various specific browser enhancements can be provided (typically, via third parties) by software plug-ins that modify the network browser. As such, to make use of these enhancements, special purpose plug-in software needs to be downloaded to and installed on a client machine. Having to download software to obtain an enhancement is burdensome and often discourages users from obtaining the enhancement. Examples of plug-ins include LiquidAudio Media Player which allows audio sound files to be played, ThirdVoice.com which facilitates a browser companion service that allows users to add comments to any webpage, etc.

There is a growing trend to move services and functionality to the Internet (World Wide Web) and to provide access to these services through a simple network browser. As such, building functionality into network browsers or providing plug-ins are not desirable approaches. Although web-based services are desirable for this trend, various companies have developed their own server-side architecture to enable their web-based services. Examples of some web based services include: anonymizer.com which provides anonymity by routing request through their website; netmind.com which allows monitoring for changes to web pages; and desktop.com which provides a web desktop (a portable web space). While these websites may be able to normally provide support for their services, they do so with a special purpose server-side design and do not provide a consistent or generally useful platform for supporting a wide range of services.

Thus, there is a need for providing a web-based platform that is capable of supporting a wide range of services.

SUMMARY OF THE INVENTION

The invention pertains to a toolbar that is provided or inserted in a markup language document so as to facilitate features or functionality provided by a server. The toolbar is able to determine whether the toolbar should be displayed as part of the markup language page being displayed. In one embodiment the server is an intermediary server.

The invention can be implemented in numerous ways, including as a system, method, device, and a computer readable medium. Several embodiments of the invention are discussed below.

As a method for inserting a toolbar into a webpage at a server machine, one embodiment of the invention includes at least the acts of: receiving a webpage at the server machine to be delivered to a client machine; inserting the toolbar into the webpage at the server machine, the toolbar including at least one link to a resource and an executable script; and delivering the webpage to the client machine.

As a method for modifying a markup language page to include a dynamically determinable toolbar according to one embodiment of the invention, the method includes at least the acts of dynamically determining whether the dynamically determinable toolbar should be displayed as part of the markup language page when said markup language page is being displayed.

As a computer readable medium including at least computer program code for determining whether a toolbar should be display in one or more frames of a webpage, said computer readable medium includes at least: computer program code for determining whether the toolbar is within the one or more frames of the webpage; computer program code for determining the size of the one or more frames of the webpage; and computer program code for displaying the toolbar in each of the one or more frames of the webpage in which the size of the one or more frames exceeds a threshold size and suppressing displaying the toolbar in each of the one or more frames of the webpage in which the size of the one or more frames does not exceed the threshold size.

As a computer readable medium including at least computer program code for inserting a toolbar into a webpage at a server machine, said computer readable medium includes at least: computer program code for receiving a webpage at the server machine to be delivered to a client machine; computer
5 program code for inserting the toolbar into the webpage at the server machine, the toolbar including at least one link to a resource and an executable script; and computer program code for delivering the webpage to the client machine.

As a dynamically determinable toolbar, one embodiment of the invention provides the dynamically determinable toolbar in a markup language page, the
10 dynamically determinable toolbar operates when the markup language page is being displayed to dynamically determine whether said dynamically determinable toolbar should be displayed as part of the markup language page.

Other aspects and advantages of the invention will become apparent from the following detailed description taken in conjunction with the
15 accompanying drawings which illustrate, by way of example, the principles of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention will be readily understood by the following detailed
20 description in conjunction with the accompanying drawings, wherein like reference numerals designate like structural elements, and in which:

FIG. 1 is a block diagram of an information retrieval system according to one embodiment of the invention;

FIG. 2A is a block diagram of an intermediary server according to one
25 embodiment of the invention;

FIGs. 2B and 2C illustrate an example of a computer system that may be used in accordance with the invention;

FIG. 3 is a flow diagram of intermediary request processing according to one embodiment of the invention;

FIGs. 4A and 4B are flow diagrams of client processing according to one embodiment of the invention;

FIGs. 5A - 5D are flow diagrams of intermediary processing according to one embodiment of the invention;

5 FIG. 6 illustrates a diagram of an information retrieval system according to one embodiment of the invention;

FIG. 7 is a diagram of application plug-in processing according to one embodiment of the invention;

10 FIG. 8 illustrates a database and a file server according to one embodiment of the invention;

FIG. 9A illustrates a toolbar activation process according to one embodiment of the invention;

FIG. 9B is a representative toolbar that can be inserted into a webpage in accordance with one aspect of the invention;

15 FIG. 10 is a flow diagram of URL modification processing according to one embodiment of the invention;

FIG. 11 is a flow diagram of a script modification processing according to one embodiment of the invention; and

20 FIGs. 12A and 12B are flow diagrams of a script modification processing according to another embodiment of the invention.

DETAILED DESCRIPTION OF THE INVENTION

25 The invention pertains to a toolbar that is provided or inserted in a markup language document so as to facilitate features or functionality provided by a server. The toolbar is able to determine whether the toolbar should be displayed as part of the markup language page being displayed. In one embodiment the server is an intermediary server.

Embodiments of this aspect of the invention are discussed below with reference to FIGs. 1 – 12B. However, those skilled in the art will readily

appreciate that the detailed description given herein with respect to these figures is for explanatory purposes as the invention extends beyond these limited embodiments.

FIG. 1 is a block diagram of an information retrieval system 100 according to one embodiment of the invention. The information retrieval system 100 includes a network 102, client machines 104 and 106, an intermediary server 108, and remote servers 110 and 112. The network 102 serves as a communication medium through which the client machines 104 and 106, the intermediary server 108 and the remote servers 110 and 112 can communicate. The network 102 is, for example, a data network which can include the Internet, a wide area network, or a local area network. The Internet refers to a global network of interconnected computers.

According to the invention, requests for content residing on the remote servers 110 and 112 can be received from the client machines 104 and 106. As used herein "content" is any information or resource that can be stored on a server and retrieved by a client. Typically, the content is embodied as an electronic file and contains text and/or images. Often the client machines 104 and 106 operate browser applications that facilitate requesting and retrieval of content over the network 102. In such case, the content is often returned to the browser application as a browser viewable document (e.g., markup language document, webpage, etc.) so that the browser application can display the same. Instead of the client machines 104 and 106 directly accessing the remote servers 110 and 112 through the network 102, the client machines 104 and 106 communicate with an intermediary server 108. The intermediary server 108 then, in turn, accesses the remote servers 110 and 112 on behalf of the client machines 104 and 106. Once the intermediary server 108 obtains the requested content from the remote servers 110 and 112, the intermediary server 108 can directly return the requested content to the client machines 104 and 106 or can first modify the requested content and then deliver it to the client machines 104 and 106.

The modification to the requested content by the intermediary server 108 can take a variety of forms. As one example, the intermediary server 108 can insert a toolbar into the requested content before delivery to the client machines 104 and 106. As another example, the intermediary server 108 can alter the hyperlinks within the requested content so as to point to an intermediary server (e.g., the intermediary server 108). Various other tasks can be performed on the requested content by the intermediary server 108.

Additionally, the information retrieval system 100 can also support centralized storage at the intermediary server 108 of server stored information as well as previously requested content. The server stored information is often referred to as "cookies", though cookies are conventionally stored on client machines. The centralized storage of the previously requested content at the intermediary server 108 can provide a history of content previously requested and returned to client machines. The history can then be later retraced, searched, etc. to locate previously retrieved content.

Although the information retrieval system 100 illustrated in FIG. 1 depicts only a pair of client machines, a pair of remote servers and a single intermediary server, it should be understood that the information retrieval system 100 can support many client machines and many server machines. It should also be understood that the information retrieval system 100 can also support multiple intermediary servers.

FIG. 2A is a block diagram of an intermediary server 200 according to one embodiment of the invention. The intermediary server 200 is, for example, suitable for use as the intermediary server 108 illustrated in FIG. 1.

The intermediary server 200 includes various processing modules typically implemented by computer program code executed by a processing device utilized by the intermediary server. More particularly, the processing modules of the intermediary server 200 include a web server 202 and a HyperText Transfer Protocol (HTTP) handler 204. The web server 202 couples to client machines through a link 206 (via a network) and the HTTP handler 204 couples to remote servers through a link 208 (via a network).

The web server 202 and the HTTP handler 204 also communicate with one another as well as with various supporting modules and a data storage device 210. The data storage device 210 provides persistent or non-volatile storage for various data items being maintained by the intermediary server 200.

- 5 Typically, for each user or requestor associated with a client machine, the data storage device provides separate storage.

The supporting modules include a session manager 212 that manages a communication session between a client machine and the intermediary server 200 as well as between the intermediary server 200 and a remote
10 server. A cookie manager 214 manages "cookies" such that those being received from a remote server are stored to the data storage device 210 and those "cookies" previously stored in the data storage device 210 are delivered to the remote server at appropriate times. More generally, "cookies" refer to server stored information. Such server stored information is often set by a
15 remote server and used for session, state or identification purposes. An application plug-in framework 216 provides support for plug-in modules that provide additional functionality to the intermediary server 200. The plug-in modules can perform a variety of different types of functions and thus provide clients or servers with additional functions or features. The plug-in modules
20 can also be developed by third-parties which can then take advantage of the infrastructure provided by the intermediary server 200 and the information retrieval system 100. The intermediary server 200 also includes an HTML parser 218 which is a processing module that is used to parse requested content received from a remote server and then modify the content (e.g.,
25 HTML content) in predetermined ways.

FIGs. 2B and 2C illustrate an example of a computer system that may be used in accordance with the invention. The computer system can, for example, correspond to any of the client machines 104 and 106, the intermediary server 108, or the remote servers 110 and 112. FIG. 2B shows
30 a computer system 221 that includes a display 223, screen 225, cabinet 227, keyboard 229, and mouse 231. Mouse 231 may have one or more buttons

for interacting with a graphical user interface. The cabinet 227 houses a removable medium (e.g., CD-ROM) drive 233, system memory and a hard drive (see FIG. 2C) which may be utilized to store and retrieve software programs incorporating computer code that implements the invention, data for use with the invention, and the like. Although CD-ROM 235 is shown as an exemplary computer readable storage medium, other computer readable storage media including floppy disk, tape, flash memory, system memory, and hard drive may be utilized. Additionally, a data signal embodied in a carrier wave (e.g., in a network including the Internet) may be the computer readable storage medium. In one implementation, an operating system for the computer system 221 is provided in the system memory, the hard drive, the CD-ROM 235 or other computer readable storage medium and serves to incorporate the computer code that implements the invention.

FIG. 2C shows a system block diagram of the computer system 221 used to perform the processing of an embodiment of the invention. As in FIG. 2C, the computer system 221 includes monitor 223 and keyboard 229, and mouse 231. The computer system 221 further includes subsystems such as a central processor 251, system memory 253, fixed storage 255 (e.g., hard drive), removable storage 257 (e.g., CD-ROM disk), display adapter 259, sound card 261, speakers 263, and network interface 265. The central processor 251, for example, can execute computer program code (e.g., an operating system) to implement the invention. An operating system is normally, but necessarily, resident in the system memory 253 during its execution. Other computer systems suitable for use with the invention may include additional or fewer subsystems. For example, another computer system could include more than one processor 251 (i.e., a multi-processor system) or a cache memory.

The system bus architecture of computer system 221 is represented by arrows 267. However, these arrows are illustrative of any interconnection scheme serving to link the subsystems. For example, a local bus could be utilized to connect the central processor to the system memory and display adapter. The computer system 221 shown in FIG. 2B is but an example of a

computer system suitable for use with the invention. Other computer architectures having different configurations of subsystems may also be utilized.

FIG. 3 is a flow diagram of intermediary request processing 300 according to one embodiment of the invention. The intermediary request processing 300 is, for example, performed by the intermediary server 108 illustrated in FIG. 1.

The intermediary request processing 300 begins with a decision 302 that determines whether a resource request has been received from a client machine. When the decision 302 determines that a resource request has not yet been received, then the intermediary request processing 300 awaits such a request. Once the decision 302 determines that a resource request has been received, then an address for the remote server having the requested resource is determined 304. The address is determined 304 from at least the resource request that has been received. Next, "cookies" (server stored information) associated with the remote server are obtained 306 from central storage. Typically, the "cookies" are maintained in the central storage by the intermediary server in a manner that associates the "cookies" with the requestor or user as well as the remote server. Then, a request for the requested resource with the associated "cookies" are sent 308 to the remote server.

At this point, the intermediary request processing 300 awaits a response to the request. In particular, a decision 310 determines whether a response has been received. When the decision 310 determines that a response has not yet been received, the intermediary request processing 300 awaits such a response. Once the decision 310 determines that a response has been received, then any "cookies" provided with the response are saved 312 to the central storage. Again, the "cookies" are preferably stored in the central storage such that they are associated with not only the user or requestor but also the remote server.

Next, the response is modified 314 so that internal links point to the intermediary server instead of one or more remote servers. After the response has been modified 314, the modified response is saved 316 to the central storage. By saving the modified response, a historical database of
5 accessed resources can be maintained for the user or requestor and thus enabling subsequent retrieval of previously viewed resources. In an alternative embodiment, the unmodified response can be saved 316 to the central storage. The modified response is then sent 318 to the requestor. At this point, the user or requestor has received the response initially requested,
10 though the response has been modified. By modifying the response, the intermediary server is able to insert itself between the client and remote server so as to provide the user with an enhanced environment for accessing remote resources. After the modified response is sent 318 to the requestor, the intermediary request processing 300 is complete and ends.

FIGs. 4A and 4B are flow diagrams of client processing 400 according
15 to one embodiment of the invention. The client processing 400 is, for example, performed by a client machine, such as the client machine 104 or the client machine 106 illustrated in FIG. 1. The client processing 400 can be considered as having two portions, a first portion representing an initial client
20 processing illustrated in FIG. 4A and a second portion representing page request client processing illustrated in FIG. 4B.

The client processing 400 initially begins by a user interacting with a client machine to request 402 a login page. The login page is utilized to
25 permit a user interacting with the client machine to log onto an intermediary server so that the intermediary server can confirm that the user is an authorized user. After the login page is requested 402, a decision 404 determines whether the login page has been received. Here, the client processing 400 awaits the receipt of the login page from the intermediary
30 server. When the decision 404 determines that the login page has not yet been received, the client processing 400 awaits receipt of the login page. Once the decision 404 determines that the login page has been received, the login page is displayed 406. Here, the login page can be presented to a user

on a display screen associated with the client machine. Once the login page is displayed 406, a user can enter login information 408. For example, the login page is typically displayed by a browser application that allows a user to enter information into the login page through use of a keyboard and/or pointing device. Next, a login to the intermediary server is requested 410.

A decision 412 then determines whether the client processing 400 has been notified of the successful login by the intermediary server. When the decision 412 determines that the login request has been declined by the intermediary server, then a login failed message is displayed 414. Thereafter, the client processing 400 can return to repeat the operation 406 and subsequent operations so that the login can be again attempted. On the other hand, when the decision 412 determines that the login request has been successful, a session identifier that has been returned from the intermediary server is stored 416. Here, the session identifier is stored (e.g., as a "cookie") on the client machine. Next, an initial webpage from the intermediary server is received and displayed 418.

The characteristics of the initial webpage are that at least some of the hyperlinks embedded therein are initially directed to the intermediary server instead of a remote server that hosts the content (resources) associated with the hyperlink. At this point, a user (or requestor) can select hyperlinks provided on the displayed webpage from the intermediary server. Further discussion below assumes that the hyperlinks of interest are all directed to the intermediary server instead of to remote servers where their content resides.

A decision 420 then determines whether a hyperlink on the displayed webpage has been selected 420. When the decision 420 determines that a hyperlink has not been selected, the client processing 400 awaits such a selection. Once the decision 420 determines that a hyperlink has been selected, the client processing 400 continues. A host name lookup is performed 422 to obtain the Internet Protocol (IP) address associated with the selected hyperlink. Typically, a Domain Name Service (DNS) server

associated with the Internet is used to obtain the IP address. Next, a connection is opened (or maintained if already opened) between the client machine and the intermediary server. The connection can utilize security measures such as Secure Sockets Layer (SSL) if desired. A request for a URL associated with the selected hyperlink together with the session identifier are then sent 426 to the intermediary server. The URL identifies the content (resource) on a remote server being requested by the selected hyperlink.

Next, a decision 428 determines whether a response has been received from the intermediary server. When the decision 428 determines that a response has not yet been received, a decision 430 determines whether a time-out has occurred. When the decision 430 determines that a time-out has occurred, then the client processing 400 returns to repeat the operation 420 and subsequent operations because the previous request for content associated with selected hyperlink was not successful. Alternatively, when the decision 430 determines that a time-out has not yet occurred, then the client processing 400 returns to repeat the decision 428 so as to continue to wait for the receipt of the response from the intermediary server.

On the other hand, when the decision 428 determines that a response has been received, then the response received from the intermediary server is displayed 432. In addition, a decision 434 determines whether there are additional fetches of content to be performed in fully rendering the response. For example, responses (e.g., such as web pages) often include source links for additional content, such as graphics or advertisements, that are obtained by additional fetches (requests). Hence, when the decision 434 determines that there are additional fetches to be made, then an additional fetch request is sent 436 to the intermediary server. Thereafter, the client processing returns to repeat the operation 428 and subsequent operations. On the other hand, when the decision 434 determines that there are no additional fetches to be made, then the client processing 400 returns to repeat the operation 420 and subsequent operations so that additional hyperlink selections can be processed. The client processing 400 ends when the session ends which can

occur through stopping the browser application, shutting down or restart of the client machine, or due to prolonged inactivity.

FIGs. 5A - 5D are flow diagrams of intermediary processing 500 according to one embodiment of the invention. The intermediary processing 500 is, for example, performed by an intermediary server, such as the intermediary server 108 illustrated in FIG. 1.

The intermediary processing 500 begins with a decision 502 that determines whether a connection request has been received. When the decision 502 determines that a connection request has been received, a connection is established 504 (or maintained if previously existing) with the requestor (client machine). The connection can be either a secure connection or an unsecure connection. For example, in the case of a secure connection, in one embodiment, a SSL handshake can be performed to exchange encryption related information. Following operation 504, the intermediary processing 500 returns to repeat the decision 502 so that a subsequent request can be processed. On the other hand, when the decision 502 determines that a connection request has not been received, then a decision 506 determines whether a URL request has been received. When the decision 506 determines that a URL request has not been received, then the intermediary processing 500 returns to repeat the decision 502 and subsequent operations.

Alternatively, when the decision 506 determines that a URL request has been received, then the intermediary processing 500 determines the type of URL being requested. In general, the URL can be associated with a remote server (remote URL) or the intermediary server (local URL). In this embodiment of the intermediary processing 500 it is assumed that a login page and a view history search page are available from the intermediary server and that various other URLs are available from remote servers. However, it should be recognized that the intermediary server can support various additional pages in a similar fashion.

More particularly, when the decision 506 determines that a URL request has been received, then a decision 508 determines whether the URL request is a login page request from a requestor. In this embodiment, the requestor is assumed to be a client machine, though the requestor could also
5 be a user of the client machine alone or in combination with the client machine. When the decision 508 determines that a login page request has been received, the login page is sent 510 to the requestor. Following the operation 510, the intermediary processing 500 returns to repeat the decision 502 and subsequent operations.

10 Alternatively, when the decision 508 determines that a login page request has not been received, a decision 512 determines whether the session is authorized. When the decision 512 determines that the session is not authorized, then the intermediary processing 500 returns to repeat the operation 510 and subsequent operations so that the requestor can be forced
15 to login and thus establish an authorized session before any (non-login) URL requests are processed. On the other hand, when the decision 512 determines that the session is authorized, then a decision 514 determines whether the URL request is a view history request. When the decision 514 determines that the URL request is a view history request, then a view history search page is sent 515 to the requestor. Following the operation 515, the
20 intermediary processing 500 returns to repeat the decision 502 and subsequent operations. Alternatively, when the decision 514 determines that the URL request is not a view history request, then the intermediary processing 500 assumes that the URL requested is a remote URL request for
25 content (resource) (e.g., web page) at a remote server and thus not a local URL request.

The intermediary processing 500 then continues for the remote URL request with preprocessing of the URL request. Initially, a decision 516
30 determines whether the URL request is a secure request. When the decision 516 determines that the URL request is not a secure request (i.e., an unsecure request), then the host name associated with the request is modified 518 to remove the intermediary name. Then, a host name lookup is

performed 520 to obtain an IP address of the appropriate remote server. A connection is then opened 522 (or maintained if already opened) to the remote server. Next, "cookies" associated with the modified host name are obtained 524. At this point, the intermediary server has completed
5 preprocessing of the URL request and is prepared to now forward the request to the remote server.

Alternatively, when the decision 516 determines that the URL request is a secure request, the preprocessing of the URL request by the intermediary server is performed differently. Initially, the host name for the appropriate
10 remote server is obtained 526. In one embodiment, the host name can be obtained 526 from storage. Here, the storage can, for example, be the data storage device 210 illustrated in FIG. 2. In another embodiment, the host name can be obtained 526 from the URL request. After the host name for the appropriate remote server is obtained 526, a host name lookup is performed
15 528 to obtain an IP address of the appropriate remote server. A connection is then opened 530 (or maintained if already opened) to the remote server. Next, a secure handshake is performed 532 between the intermediary server and the remote server as needed. The "cookies" associated with the obtained host name are then obtained 534. Following the operation 534, the
20 preprocessing of the URL request at the intermediary server is completed and the request is now able to be forwarded to the remote server.

At this point, regardless of whether processing a secure or unsecure URL request, the request for the URL with associated "cookies" is sent 536 to the remote server. A decision 538 then determines whether a response has
25 been received. When the decision 538 determines that a response has not yet been received, the intermediary processing 500 awaits such a response. Once the decision 538 determines that a response has been received, then a decision 540 determines whether "cookies" are present in the response. When the decision 540 determines that "cookies" are present in the response,
30 then the "cookies" are extracted 542 from the response. The extracted "cookies" are then saved 544. Typically, the "cookies" are stored in central storage provided within or associated to the intermediary server. Following

the operation 544, as well as following the decision 540 when it is determined that "cookies" are not present in the response, then a host name portion of any URLs within headers of the response are modified 546.

A decision 548 then determines whether the response is a HTML response. Here, in general, a response can be of a variety of forms such as HTML, graphics, .pdf, MPEG, or other various formats. When the decision 548 determines that the response is not a HTML response, then the response can be immediately sent (or forwarded) 550 to the requestor. Then, a decision 552 determines whether the response is completed. When the decision 522 determines that the response is completed, then the intermediary processing 500 returns to repeat the decision 502 and subsequent operations so that additional requests can be processed. On the other hand, when the decision 552 determines that so far only a portion of the response has been sent to the requestor, then the intermediary processing 500 returns to repeat the decision 538 and subsequent operations so that subsequent portions of the response can be similarly processed.

On the other hand, when the decision 548 determines that the response is an HTML response, then the response is processed 554 through any application plug-in(s) that are installed or present at the intermediary server. Next, the resulting HTML is saved 556 with reference to the requestor. Here, the resulting HTML is saved so that the requestor can, at a later date, retrieve previously requested HTML and thus review or search through content that has been previously requested (i.e., one's historical trail) by the requestor. Next, a toolbar HTML can be inserted 558 into the resulting HTML. The toolbar that is produced by the toolbar HTML can provide controls or content that are added to the resulting HTML so as to facilitate features or functionality provided by the intermediary server. Next, certain URLs within the resulting HTML can be modified 560. In one embodiment, the modifications 560 to the certain URLs can be achieved by modifying the host name portion of URLs within certain tags of the resulting HTML. In another embodiment, the modifications 560 to the certain URLs can be achieved by adding suffixes to the certain URLs. The suffixes thus serve to

allow the URLs to carry additional information. Further, certain URLs provided or produced by scripting language portions within the resulting HTML can be modified 562. Examples of scripting languages include JavaScript and VBscript. In one embodiment, a host name portion of the certain URLs provided or produced by scripting language portions within the resulting HTML are modified 562. In another embodiment, the certain URLs provided or produced by scripting language portions are modified 562 to include suffixes which carry supplemental information. Additional details on modifying scripting language portions is provided below with reference to FIGs. 12A and 12B. Thereafter, the resulting HTML is sent 564 to the requestor.

A decision 566 then determines whether the request has been completed. When the decision 566 determines that the request has been completed, then the intermediary processing 500 returns to repeat the decision 502 and subsequent operations so that additional requests can be processed. On the other hand, when the decision 566 determines that the request is not yet completed, then the intermediary processing 500 returns to repeat the decision 538 and subsequent operations so that remaining portions of the response can be similarly processed upon being received. The intermediary processing 500 can thus operate to process a single response to a URL request in multiple pieces or blocks of data. In such case, the intermediary processing 500 can process a response from a remote server as it arrives so that responsiveness to the requestor is not hindered. In this regard, the intermediary processing 500 causes the operations 538 – 566 to be repeated for each piece or block of data associated with a response.

FIG. 6 illustrates a diagram of an information retrieval system 600 according to one embodiment of the invention. The information retrieval system 600 is generally similar to the information retrieval system 100 of FIG. 1. The operation of the information retrieval system 600 is discussed below with reference to three representative examples which illustrate its operation according to one embodiment. One example pertains to an unsecure request and the other examples pertain to a secure request. The information

retrieval system 600 includes a client 602, an intermediary server 604 with a data store 606, and a remote server 608. It is assumed that the initial client processing portion (e.g., FIG. 4A) has already been performed.

The first representative example pertains to an unsecure request which can be initiated by the user selecting (420) a hyperlink in a displayed webpage. The selected hyperlink is assumed to be

<http://www.xyz.com.danastreet.com/quote/msft>

where "http" is the protocol, "www.xyz.com.danastreet.com" is the hostname with "danastreet.com" being a domain and "xyz.com" being a subdomain, and "/quote/msft" being a path to the particular resource being requested by selection of the hyperlink. Hence, the domain name lookup (422) of the hostname "www.xyz.com.danastreet.com" is resolved to the IP address of danastreet.com. This can be achieved by configuring network routers to give the same IP address for any subdomain of datastreet.com. The request is then sent (426) from the client 602 to the intermediary server 604. The request is, for example, as follows:

```
GET: /quote/msft HTTP/1.0
Host: www.xyz.com.danastreet.com
Cookie: DSID = 123xyzzbc
```

Other information can also be included within the request such as other cookies, encoding-accepted, etc. The cookie is, in this example, a session cookie and is used in determining whether the client 602 is authorized (514) for user with the intermediary server 604.

In the case of an unsecure request, the hostname within the request is modified (518) to remove the "danastreet.com" portion and then perform a domain name lookup (520) on the modified portion (i.e., remaining portion) of the hostname ("www.xyz.com"). Any cookies in the data store 606 previously received on behalf of the user that are associated with the modified hostname are then obtained (524). Next, a request by the intermediary server 604 is sent (536) to the remote server 608. The request is, for example, as follows:

```
GET: /quote/msft HTTP/1.0
```

Host: www.xyz.com
Cookie: xyzUserID = sam

Other information can also be included within the request. Note that the
5 cookie provided with the original request pertains to the intermediary server
604 and thus is not forwarded with the request to the remote server 608.

The remote server 608 receives the request and returns (538) a
response header and some or all of the content of the requested resource.
An exemplary response can have the following format:

```
10      200 OK
      Set-cookie: xyzuserID = Samuel, expires = 01-Jul-2002
      Content-type: text/html
      Content-length: 2000
      Location: http://www.xyz.com/stockquote/msft
15      <HTML>

          * * *

20      </HTML>
```

Since the response included a "cookie" to be set, the set-cookie command is
remove (542) from the response and then saved (544) in the data store 606.
Next, to the extent they are present, the hostnames within the headers are
modified (546) to point to the intermediary server 604. In this example, the
25 location header includes a full path (including hostname), namely,
http://www.xyz.com/stockquote/msft, which is thus modified to
http://www.xyz.com.danastreet.com/stockquote/msft. For paths in the
headers that do not include hostnames, no modifications are needed as the
browser application operating on the client 602 will cause the current
30 hostname ("www.xyz.com.danastreet.com") to be used for such paths. Next,
processing through one or more plug-in(s) can be performed (554) to alter,
modify or supplement the HTML data accompanying the response. The
resulting HTML is saved (556) in the data store 606. If desired, a toolbar can
be inserted (558) into the resulting HTML to facilitate operations or functions
35 supported by the intermediary server 604. Still further certain URLs within the
resulting HTML or those produced by scripting languages are modified (560),

562) to point to the intermediary server 604. For example, if the resulting HTML included the following hyperlink:

``

then the hyperlink would be modified to the following:

5 ``

Additional details are provided below on the modification (560, 562) of the certain URLs within the resulting HTML or those produced by scripting languages. Thereafter, the response including the modified HTML can be delivered (564) from the intermediary server 604 to the client 602.

10 The second representative example pertains to a secure request which can be initiated by the user selecting (420) a hyperlink in a displayed webpage. The selected hyperlink is assumed to be

<https://secure.danastreet.com:700/quote/msft>

where "https" is the protocol which uses Secure Sockets Layer (SSL),

15 "www.secure.danastreet.com" is the hostname with "danastreet.com" being a domain and "secure" being a subdomain, "700" indicating a port number, and "/quote/msft" being a path to the particular resource being requested by selection of the hyperlink. Hence, the domain name lookup (422) of the hostname "secure.danastreet.com" is resolved to the IP address of
20 danastreet.com. For secure communications, the browser in making the connection to the hostname will require an authentication certificate be present for the hostname. The presence of such an authentication certificate for the matching hostname is helpful because a browser attempting such a secure connection does not alert the user of its absence (e.g., with a pop-up
25 dialog box). Here, single certificate for "secure.danastreet.com" can be used for all secure requests. The request is then sent (426) from the client 602 to the intermediary server 604. The request is, for example, as follows:

30 GET: /quote/msft HTTP/1.0
 Host: secure.danastreet.com:700
 Cookie: DSID = 123xyzzbc

Other information can also be included within the request such as other cookies, encoding-accepted, etc. The cookie is, in this example, a session cookie and is used in determining whether the client 602 is authorized (514) for user with the intermediary server 604.

5 In the case of a secure request, the hostname within the request is not able to directly identify the remote server 608 where the request is eventually to be delivered. However, the hostname for the remote server 608 can be obtained (526) from the data storage 606. More particularly, in accordance with one embodiment, the port number and a session (or user) identifier are
10 used to lookup in the data storage 606 the appropriate hostname. Here, the port number "700" for the client 602 is assumed to represent "xyz.com". Once the appropriate hostname has been obtained (526), a domain name lookup (528) is performed on the hostname ("www.xyz.com"). Next, a connection between the intermediary server 604 and the remote server 608 is opened
15 (530) or maintained is already opened, and secure handshaking performed (532). Any cookies in the data store 606 previously received on behalf of the user that are associated with the hostname are then obtained (534). Next, a request by the intermediary server 604 is sent (536) to the remote server 608. The request is, for example, as follows:

20 GET: /quote/msft HTTP/1.0
Host: www.xyz.com
Cookie: xyzUserID = sam

Other information can also be included within the request. Note that the
25 cookie provided with the original request pertained to the intermediary server 604 and thus is not forwarded with the request to the remote server 608.

The remote server 608 receives the request and returns (538) a response header and some or all of the content of the requested resource.

An exemplary response can have the following format:

30 HTTP/1.0 200 OK
Set-cookie: xyzuserID = Samuel, expires = 01-Jul-2002
Content-type: text/html
Content-length: 2000
Location: https://www.xyz.com/stockquote/msft

<HTML>

* * *

</HTML>

Since the response included a "cookie" to be set, the set-cookie command is remove from the response (542) and then saved (544) in the data store 606.

Next, to the extent they are present, the hostnames within the headers are

modified (546) to point to the intermediary server 604. In this example, the location header includes a full path (including hostname), namely, <https://www.xyz.com/stockquote/msft>, which is thus modified to <https://secure.danastreet.com:700/stockquote/msft>. For paths in the headers

that do not include hostnames, no modifications are needed as the browser application operating on the client 602 will cause the current hostname with port number ("www.secure.danastreet.com:700/") to be used for such paths. Next, processing through one or more plug-in(s) can be performed (554) to alter, modify or supplement the html data accompanying the response. The resulting html is saved (556) in the data store 606. If desired, a toolbar can be inserted (558) into the resulting html to facilitate operations or functions supported by the intermediary server 604. Still further the hostname portion of URLs within certain tags within the resulting html or those produced by scripting languages are modified (560, 562) to point to the intermediary server 604. For example, if the resulting html included the following hyperlink:

<a ref = <https://www.ijk.com/quote/msft>>

then the hyperlink would be modified to the following:

<a ref = <https://secure.danastreet.com:701/quote/msft>>

As another example, the resulting html could also include hyperlinks not requiring a secure connection and thus be converted as noted above in the first representative example. Additional details are provided below on the modification (560, 562) of the certain URLs within the resulting HTML or those produced by scripting languages. Thereafter, the response including the

modified HTML can be delivered (564) from the intermediary server 604 to the client 602.

The third representative example pertains to a secure request which can be initiated by the user selecting (420) a hyperlink in a displayed webpage. The selected hyperlink is assumed to be

<https://secure.danastreet.com/quote/msft:danainfo:host=www.xyz.com>

where "https" is the protocol which uses Secure Sockets Layer (SSL), "secure.danastreet.com" is the hostname with "danastreet.com" being a domain and "secure" being a subdomain, "/quote/msft" being a path to the particular resource being requested by selection of the hyperlink, "danainfo" is a keyword, and "www.xyz.com" is the host where the requested resource resides. Hence, the domain name lookup (422) of the hostname "secure.danastreet.com" is resolved to the IP address of danastreet.com. The request is then sent (426) from the client 602 to the intermediary server 604. The request is, for example, as follows:

```
GET: /quote/msft:danainfo:host=www.xyz.com HTTP/1.0
Host: secure.danastreet.com
Cookie: DSID = 123xyzabc
```

Other information can also be included within the request such as other cookies, encoding-accepted, etc. The cookie is, in this example, a session cookie and is used in determining whether the client 602 is authorized (514) for user with the intermediary server 604.

In the case of a secure request, the hostname within the request is not able to directly identify the remote server 608 where the request is eventually to be delivered. However, the hostname for the remote server 608 is obtained (526) from information provided with the request. More particularly, the information (i.e., host variable) provided as a suffix with the request. In this example, the suffix includes the information that the hostname of the remote server 608 is "www.xyz.com". Once the appropriate hostname has been obtained (526), a domain name lookup (528) on the hostname ("www.xyz.com") is performed. Next, a connection from the intermediary

server 604 and the remote server 608 is opened (530) or maintained if already opened, and secure handshaking is performed (532). Any cookies in the data store 606 associated with the hostname and the requestor are then obtained (534). Next, a request by the intermediary server 604 is sent (536) to the remote server 608. The request is, for example, as follows:

```
GET: /quote/msft HTTP/1.0
Host: www.xyz.com
Cookie: xyzUserID = sam
```

Other information can also be included within the request. Note that the cookie provided with the original request pertained to the intermediary server 604 and thus is not forwarded with the request to the remote server 608.

The remote server 608 receives the request and returns (538) a response header and some or all of the content of the requested resource.

An exemplary response can have the following format:

```
HTTP/1.0 200 OK
Set-cookie: xyzuserID = Samuel, expires = 01-Jul-2002
Content-type: text/html
Content-length: 2000
Location: https://www.xyz.com/stockquote/msft
<HTML>
```

* * *

```
</HTML>
```

Since the response included a "cookie" to be set, the set-cookie command is remove from the response (542) and then saved (544) in the data store 606. Next, to the extent they are present, the hostnames within the headers are modified (546) to point to the intermediary server 604. In this example, the location header includes a full path (including hostname), namely, https://www.xyz.com/stockquote/msft, which is thus modified to https://secure.danastreet.com/stockquote/msft:danainfo:host=www.xyz.com. In this example, not only are the hostnames modified but also variables are added to the end (i.e., suffix) of the URL. With this example, the relative URLs need to be modified to include the variable information

("danainfo:host=www.xyz.com") at the end of the relative URLs. The hostnames for the relative URLs are properly provided by the browser application operating on the client 602 will cause the current hostname ("secure.danastreet.com") to be used for such paths. Next, processing through one or more plug-in(s) can be performed (554) to alter, modify or supplement the html data accompanying the response. The resulting HTML is saved (556) in the data store 606. If desired, a toolbar can be inserted (558) into the resulting HTML to facilitate operations or functions supported by the intermediary server 604. Still further the hostname portion of URLs within certain tags within the resulting HTML or those produced by scripting languages are modified (560, 562) to point to the intermediary server 604. For example, if the resulting HTML included the following hyperlink:

```
<a ref = https://www.xyz.com/quote/msft>
```

then the hyperlink would be modified to the following:

```
<a ref=https://secure.danastreet.com/quote/msft:danainfo:host=www.xyz.com>
```

Also, if the resulting html include the following relative hyperlink:

```
<a ref = a.html>
```

then the hyperlink would be modified to the following:

```
<a ref = a.html:danainfo:host=www.xyz.com>
```

As another example, the resulting HTML could also include hyperlinks not requiring a secure connection and thus be converted as noted above in the first example. Thereafter, the response including the modified HTML can be delivered (564) from the intermediary server 604 to the client 602. In any case, one advantage of this third exemplary approach is that the browser application at the client machine can execute scripting language instructions to perform the modifications, and thus alleviates some processing burden from the intermediary server.

The application plug-ins can operate to perform a variety of functions. Typically, the various application plug-ins can be considered as filters that operate in a serial fashion stacked one upon another and serve to alter or

modify the HTML data. The modifications (or filtering) can serve to translate the HTML data between languages, remove advertisements from the HTML pages, provide customization for the requestors, etc.

FIG. 7 is a diagram of application plug-in processing 700 according to one embodiment of the invention. The application plug-in processing 700 is, for example, associated with application plug-ins that have been registered with the application plug-in framework 216 illustrated in FIG. 2A. Each application plug-in serves to, in some manner, alter, modify or supplement the HTML data associated with the response. The application plug-in processing 700 is, for example, performed by the operation 554 illustrated in FIG. 5D. The application plug-in processing 700 typically receives the HTML data associated with the response (though it may have already been partially modified, e.g., by operation 546 illustrated in FIG. 5C). In any case, the HTML data received is sent through one or more plug-in modules. Each of the plug-in modules can be provided by a different third-party to alter, modify or supplement the HTML data in different ways. In the embodiment shown in FIG. 7, the incoming HTML data is first sent to application plug-in #1 702, and then the resulting HTML data is passed through application plug-in #2 704, and then the resulting HTML data is supplied to an application plug-in #3 706. The modified HTML data output from the application plug-in #3 706 represents the HTML data after passing through the series of application plug-ins. In this manner, multiple third-party applications can be provided and supported by the intermediary server 100, 200. This allows different applications to alter the HTML data in different ways so that multiple features or services can be supported by the platform or architecture provided by the information retrieval system 100, namely, the intermediary server 108, 200.

In accordance with another aspect of the invention, the intermediary server (e.g., intermediary server 108, 200) operates to store remote resources that have been requested by various requestors. As an example, operation 556 of FIG. 5D pertains to saving resulting HTML with reference to the particular requestor. In general, the resources (e.g., HTML) can be stored

in a data storage device such as the data storage device 210 illustrated in FIG. 2A. More particularly, however, the data storage device 210, can include a database and a file server. FIG. 8 illustrates a database 800 and a file server 802 according to one embodiment of the invention. The database 800 and the file server 802 together operate to provide intelligent data storage for resources that have been requested by requestors through the intermediary server. The database 800 illustrated in FIG. 8 stores the URL's that have been previously requested by various users. For example, as shown in FIG. 8, for user-A, the database 800 stores the URL, host name, path, timestamp, and a file reference for each remote resource request. The timestamp indicates the time at which the URL was requested or received. The intermediary server can set the timestamp or the requestor can set the timestamp. The file reference is a unique reference to a file residing within the file server 802. The file stored within the file server 802 is the response (e.g., resulting HTML or content) that was previously viewed by the requestor.

By providing the storage of resources that requestors have previously obtained through the intermediary server, the intermediary server can thus serve as storage of a history of resources that various users (requestors) have previously retrieved. This allows requestors to subsequently request from the intermediary server those resources that the users have previously requested through the intermediate server.

The retrieval of such previously requested resources can be facilitated by a view history search page (e.g., operation 515 of FIG. 5A). The view history search page can enable a requestor to search through the resources (pages, documents, etc.) that the requestor has previously obtained through the intermediary server to thereby identify one or more particular previously viewed resources. The searching can include text searching of the resources themselves. The searching can also be facilitated by filtering on any of the parameters stored within the database, such as hostname or timestamp. In addition, the database could also store keywords or phrases for each or some of the resources, to thereby facilitate searching through such keywords or

phrases. The timestamp can be used so that the storage of identical URL's (resources) can be achieved but distinguished the resources by their timestamp. This allows the same resource to be saved multiple times (even for a particular requestor) and be distinguished by the different timestamps.

- 5 The content of the resource saved at the different times may or may not be different. Hence, the view history search page could also link the URL's that are the same such that requestors are given the opportunity to retrieve the other versions of the same resource that have been stored at different times.

- Still further, a resource request typically has internal links that retrieve
10 other resources that form a portion of the overall resource. For example, a webpage can contain a link (e.g., internal link or hyperlink) to another resource location to retrieve an image. This is commonly done for providing a banner advertisement for the webpage. These internal links are also stored within the database in accordance with one embodiment of the invention.
- 15 Hence, if a requestor desires to retrieve a resource that has been previously stored, the webpage is typically initially requested and then retrieved from the data storage device. Once the webpage is received, the requestor (e.g., network browser operating on the client machine) operates to request and then retrieve the internal links from the data storage device. If, for some
20 reason, the content associated with the internal links is not available from the data storage device, then the user can be so informed and offered the opportunity to retrieve the content from the remote server or other options.

- Another aspect of the invention concerns the insertion of a toolbar into the response (i.e., HTML data) provided by the remote server before the
25 response is delivered to the requestor. Such toolbar insertion can, for example, be performed at operation 558 of FIG. 5D. Alternatively, such toolbar insertion can be performed by an application plug-in such as shown in FIG. 7.

- The toolbar that is inserted within the webpage (e.g., HTML data) can
30 take a variety of different forms. More particularly, the toolbar is inserted into

the HTML data of the webpage by inserting toolbar HTML into the HTML data. In one embodiment, the toolbar HTML includes graphical and/or textural content for the toolbar that is displayed when the HTML data is displayed when rendered on the client machine via a network browser. The toolbar HTML also includes one or more links to other resources. The links can be graphical or textual and thus be associated with the graphical and/or textural content. In one embodiment, the toolbar HTML also includes an activation script. The activation script is a script programming language understood by the network browser on the client machine. The activation script is executed by the browser at the client machine when seeking to render the toolbar HTML for the requestor. Examples of the script programming language include JavaScript and VBscript. The toolbar HTML can be inserted into the HTML data in a variety of different positions. In one embodiment, the toolbar HTML is inserted into the HTML data directly following the initial body tag (<body>) so as to place the toolbar at the top portion of the rendered HTML page.

The insertion of the toolbar into web pages can be relatively straightforward or complex, depending upon the particular webpage. However, for a general solution, the toolbar insertion operations need to be intelligent enough to determine when it is appropriate to insert the toolbar and when not too. In this regard, the webpage (e.g., HTML data) is modified to insert JavaScript code following a body tag within each frame associated with the webpage. When executed at the client side, the JavaScript code determines if it is currently within a frame. If it is not currently in a frame, then the toolbar can simply be inserted. On the other hand, when the JavaScript code determines that it is within a frame, then it examines the size of the frame to determine whether the frame is large enough to support the toolbar being inserted. In other words, the JavaScript code for insertion of the toolbar is inserted into every page, indeed every frame of every page, but is only displayed in certain pages or frames.

FIG. 9A illustrates a toolbar activation process 900 according to one embodiment of the invention. The toolbar activation process 900 is processing associated with an activation script. The toolbar activation process 900 is performed by the network browser at the client machine when the resulting HTML is being rendered by the network browser. The toolbar activation process 900 begins with a decision 902 that determines whether the activation script being executed is within a frame of the resulting HTML. The resulting HTML pertains to a webpage that is displayed by the network browser. Web pages, or their HTML description, can define none, one or multiple frames. The toolbar HTML is inserted into the webpage (resulting HTML) at least once and, if one or more frames are defined, inserted into each of the frames. When the decision 902 determines that the activation script being executed is not within a frame, then the toolbar can be rendered 904 as part of the webpage produced by the network browser. On the other hand, when the decision 902 determines that the activation script is within a frame, then a decision 906 determines whether the size of the frame is greater than a threshold size. Here, the size of the current frame is examined to determine whether it is of sufficient size (e.g., height and width) to properly support the toolbar. When the decision 906 determines that the size of the frame is greater than the threshold size, then the toolbar activation process 900 has determined that the frame is sufficiently large enough to support the toolbar and thus renders 904 the toolbar via the network browser. On the other hand, when the decision 906 determines that the size of the frame is not greater than the threshold size, then the toolbar is not rendered and the toolbar activation process 900 is complete and ends. Accordingly, the toolbar activation process 900 can be performed at least once for the webpage and multiple times if frames are present, such that each instance of the toolbar activation process 900 dynamically self-determines whether the toolbar instance should be rendered within the particular webpage or frame thereof.

An example of an activation script for performing operations 902 and 906 of the toolbar activation process 900 is as follows:

```
If (self==top ||
(document.body?(document.body.clientWidth>400
&&document.body.clientHeight>200) :
(self.innerWidth>400&&self.innerHeight>200))) [toolbar
rendering HTML]
```

Note that the toolbar rendering HTML is then written to the network browser to render the toolbar when the "if" statement conditions are met. Here, there are two alternative statement conditions, one for Netscape Navigator network browsers and another for Microsoft Internet Explorer network browsers.

FIG. 9B is a representative toolbar 920 that can be inserted into a webpage in accordance with one aspect of the invention. The representative toolbar 920 is, for example, inserted into the top or bottom of web pages. As noted above, in one embodiment of the invention, the representative toolbar 920 can be rendered in each of the frames of multi-frame web pages that are sufficiently large enough to support the representative toolbar 920.

The representative toolbar 920 includes a series of graphical links 922-936 that are displayed by a network browser. Upon selection of one of the graphical links 922-936, the network browser can be directed to display another resource. The graphical links 922-936 are hyperlinks to predetermined resources. The graphical link 922 represents a company logo "Dana Street" for the company that provides the intermediary server processing. Upon a user clicking on the graphical link 922, the customized homepage for the user provided by the intermediary server can be displayed. The graphical link 924 can display the name of the logged-on user (e.g., "sam") and can also be linked to the user's homepage within the system. The graphical link 926 represents a history management application. Upon selecting the graphical link 926, a history search page can be displayed for the user. In addition, the graphical link 926 can also indicate whether the history management application for the user is "on" or "off" as well as permit the user to toggle between "on" and "off". A graphical link 928 represents a graphical icon associated with a third party application that provides

information about the current site being viewed (e.g., yahoo). Here, the third party application pertains to an external service in which the "A" represents the logo of the external service provider (e.g., <http://www.alexa.com>). The graphical link 930 is an icon that links to a third party application that provides comparative purchasing options. Here, the external service providing the comparison information is, for example, <http://www.clickthebutton.com>. The graphical link 932 is a link to a translation application. As shown in FIG. 9B, the graphical link 932 also indicates that the translator is active in translating to a particular target language (e.g., German in this example). Selecting the graphical link 932 causes a dialog to appear such that a user can turn on and off the translation or switch target languages. The graphical link 934 is a link to a third party application that manages bookmarks on the Internet. The representative external service in this example is Yahoo! Bookmarks (<http://bookmarks.yahoo.com>). Hence, this graphical link 934, in particular, illustrates that third party applications, such as yahoo applications, which appear on a yahoo page toolbar can also be integrated into the representative toolbar 920 without change to their backend service. The graphical link 936 enables a user to log-out from the intermediary server.

The representative toolbar 920 illustrated in FIG. 9B is only one example of a toolbar. It should be recognized that many different toolbars can be used with the toolbar activation process 900. The toolbars can have various different appearances and can provide access to various different services, applications or features.

FIG. 10 is a flow diagram of URL modification processing 1000 according to one embodiment of the invention. The URL modification processing 1000 is, for example, processing performed by operation 560 of FIG. 5D. The URL modification processing 1000 can, for example, be performed by the HTML parser 218 and/or the HTTP handler 204 illustrated in FIG. 2A.

The URL modification processing 1000 begins by selecting 1002 a target URL within the resulting HTML (webpage). Typically, one or more

target URLs are previously identified by scanning the resulting HTML data. Then, a decision 1004 determines whether the target URL is a relative URL. When the decision 1004 determines that the target URL is not a relative URL, then a decision 1006 determines whether the target URL is associated with a
5 secure request (e.g., HTTPS). When the decision 1006 determines that the target URL is not associated with a secure request, then a predetermined hostname is appended 1008 to the hostname provided in the target URL. In other words, the hostname originally provided for the target URL is effectively rewritten such that the original hostname becomes a sub domain and the
10 predetermined hostname becomes the domain for the target URL. Next, a decision 1010 determines whether a port number is specified in the target URL. When the decision 1010 determines that a port number is not specified in the target URL, no port number processing is needed so a decision 1012 then determines whether more target URLs to be processed. As previously
15 noted, these target URLs can have been previously identified by scanning the resulting HTML data. When the decision 1012 determines that there are more target URLs, then the URL modification processing 1000 returns to repeat the operation 1002 and subsequent operations so that additional target URLs can be processed. Alternatively, when the decision 1012
20 determines that there are no more target URLs, then the URL modification processing 1000 is complete and ends.

On the other hand, when the decision 1006 determines that the target URL is associated with a secure request, then a hostname suffix is added
1014 to the target URL. Then, the hostname of the target URL is replaced
25 1016 with a predetermined hostname. Following operation 1016, the URL modification processing 1000 proceeds to the decision 1010.

When the decision 1010 determines that a port number is specified in the target URL, then a port number suffix is added 1018 to the target URL. Next, the port number is removed 1020 from after the hostname in the target
30 URL. Following the operation 1020, the URL modification processing 1000 performs the decision 1012.

On the other hand, when the decision 1004 determines that the target URL is a relative URL, a decision 1022 determines whether the source URL has a hostname or port suffix. The source URL is the URL associated with the webpage (including the resulting HTML) that includes the target URL.

- 5 When the decision 1022 determines that the source URL does have either a hostname or a port suffix, then the hostname and/or the port suffix are appended 1024 to the target URL. Following the operation 1024, as well as following the decision 1022 when the source URL does not have a hostname or a port suffix, the URL modification processing 1000 performs the decision
- 10 1012.

Additionally, although not shown in FIG. 10, it should be noted that the URL modification processing can also operate to add a unique identifier to the URL as a port number as discussed above.

- FIG. 11 is a flow diagram of a script modification processing 1100 according to one embodiment of the invention. The script modification processing 1100 is, for example, performed by operation 562 illustrated in FIG. 5D. In general, the script modification processing 1100 operates to modify script portions within the resulting HTML.
- 15

- The script modification processing 1100 initially scans 1102 the HTML data (e.g., of the resulting HTML) for a <script> tag. A decision 1104 then determines whether a script has been found. When the decision 1104 determines that a script has not been found, then a decision 1106 determines whether there is more HTML data to be scanned. When the decision 1106 determines that there is more HTML data to be scanned, then the script modification processing 1100 returns to repeat the operation 1102 and subsequent operations. Alternatively, when the decision 1106 determines that there is no more HTML data to be scanned, the script modification processing 1100 is complete and ends.
- 20
- 25

- On the other hand, when the decision 1104 determines that a script has been found, then the script is searched 1108 to locate text strings "http://"
- 30

or "https://" followed by a hostname. A decision 1110 then determines whether a URL hostname has been found by the searching 1108 of the script. When the decision 1110 determines that a URL hostname has not been found, then a decision 1112 determines whether the end of the script has been reached. When the decision 1112 determines that the end of the script has not yet been reached, then the script modification processing 1100 returns to repeat the operation 1108 and subsequent operations. Alternatively, when the decision 1112 determines that the end of the script has been reached, then the script modification processing 1100 returns to repeat the operation 1102 and subsequent operations so that additional scripts can be found and processed.

On the other hand, when the decision 1110 determines that a URL hostname has been found, then a rewritten hostname is produced 1114. For example, if the URL hostname that was found is "xyz.com", the rewritten hostname that is produced 1114 can, for example, be "xyz.com.danastreet.com". The hostname provided within the script is then replaced 1116 with the rewritten hostname. Following the operation 1116, the script modification processing 1100 returns to repeat the operation 1108 and subsequent operations so that additional hostnames within the script can be similarly processed.

FIGS. 12A and 12B are flow diagrams of a script modification processing 1200 according to another embodiment of the invention. The script modification processing 1200 is, for example, performed by operation 562 illustrated in FIG. 5D. In general, the script modification processing 1200 operates to modify script portions within the resulting HTML.

The script modification processing 1200 initially scans 1201 the HTML data (e.g., of the resulting HTML) for a <script> tag. A decision 1202 then determines whether a script has been found. When the decision 1202 determines that a script has been found, then the script is parsed 1204 to determine or locate predetermined properties and functions associated with the script. As decision 1206 then determines whether at least one property or

function has been found in the script. When the decision 1206 determines that at least one property or function has been found, then the script modification processing 1200 continues such that the script is modified with respect to the properties or functions found within the script so that the script operates as intended even though the intermediary server is interposed between client devices and remote servers.

In particular, for each property or function found within the script, the processing is as follows. A decision 1208 determines whether a selected property or function found within the script pertains to a read of a cookie property. When the decision 1208 determines that the identified property or function does pertain to a read of a cookie property, then the read of the cookie property is replaced 1210 with a `get_cookies` function call. Alternatively, when the decision 1208 determines that the identified property or function is not a read of a cookie property, as well as following the operation 1210, a decision 1212 determines whether the identified property or function pertains to a write to a cookie property. When the decision 1212 determines that the identified property or function does pertain to a write to a cookie property, the write to the cookie property is replaced 1214 with a `set_cookies` functions call.

On the other hand, when the decision 1212 determines that the identified property or function is not associated with a write to a cookie property, as well as following the operation 1214, a decision 1216 determines whether the identified property or function pertains to a write to a property that initiates a request. When the decision 1216 determines that the identified property or function does pertain to a write to a property that initiates a request, then the write to the property that initiates (causes) a request to be replaced 1218 with a `set_URL` function call. Alternatively, when the decision 1216 determines that the identified property or function does not pertain to a write to a property that initiates a request, as well as following the operation 1218, a decision 1220 determines whether the identified property or function pertains to a read from a property that returns a URL. When the decision 1220 determines that the identified property or function does pertain to a read

from a property that returns a URL, then the read from a property that returns a URL is replaced 1222 with an appropriate string.

Furthermore, following the decision 1220 when the identified property or function does not pertain to a read from a property that returns a URL, as well as following the operation 1222, a decision 1224 determines whether more properties or functions were found in the script that still need to be processed. When additional properties or functions have been found and need processing, the script modification processing 1200 returns to repeat the decision 1208 and subsequent operations so that the additional properties or functions can be similarly processed. On the other hand, when the decision 1224 determines that all the properties or functions that have been found within the script have been processed, then the script modification processing 1200 performs a decision 1226. The decision 1226 is also performed when the decision 1202 determines that a script has not been found. The decision 1226 determines whether there is more HTML data to be scanned. When the decision 1226 determines that there is more HTML data to be scanned, then the script modification processing 1200 returns to repeat the operation 1201 and subsequent operations. Alternatively, when the decision 1226 determines that there is no more HTML data to be scanned, the script modification processing 1200 is complete and ends.

Representative examples of a `get_cookies` function, a `set_cookies` function, a `set_URL` function, and string substitution are provided below. These examples are provided to assist understanding and thus should not be deemed restrictions on any aspect of the invention. The following examples use JavaScript as the scripting language.

A first example with respect to the `get_cookies` function and operation 1210 is as follows. In this example, the script includes a script instruction

```
var c = document.cookie;
```

which assigns the cookies associated with the document (page) to the variable `c`. This script instruction would be replaced with

```
var c = get_cookies ("othercookie=abc");
```

which assigns the cookies present on the intermediary server for the particular domain of the document (page) and the particular user (e.g., "othercookie=abc"). In addition, the `get_cookies` function takes the cookies from the intermediary server as its argument and adds to it other cookies that are set by the script.

A second example with respect to the `set_cookies` function and operation 1214 is as follows. In this example, the script includes a script instruction

```
document.cookie = "selection=ijk; expires= ...";
```

which stores the cookies associated with the document (page) in the browser. This script instruction (statement) is replaced with

```
document.cookie = set_cookie("<domain>", "selection=ijk; expires= ...");
```

which stores the cookies associated with the document (page) in the browser and also to the intermediary server. The `set_cookie` function includes two arguments. The first argument identifies the domain of the page having the script. The second argument is the value that was originally being assigned to the `document.cookie` property. The `set_cookie` function combines these two arguments and sets a cookie called `servercookieX` with no expiration, where `X` represents a distinguishing numeric value. The browser will cause this cookie to be sent to the intermediary server. The intermediary server can then incorporate the cookie into the cookie storage for the user. The cookie can also be used to expire an existing cookie in storage for the user. Once the cookie is stored at the intermediary server, the next page that the intermediary server returns will cause the `servercookieX` to expire because its no longer needed. Any calls to the `set_cookie` function will also append any cookie values provided within the `servercookieX`.

To further illustrate, consider the following example, where a page from `www.xyz.com` has the following script:

```
document.cookie = "a=b";
```

```
var x = document.cookie;
```

Assume also the www.xyz.com server has previously returned a cookie to the intermediary server that has name "id1" with value "sam". The code above will be transformed into:

```
5      document.cookie = set_cookie ("www.xyz.com", "a=b");  
  
      var x = get_cookie ("id1=sam");
```

The first line will cause a cookie "servercookie0" to be set that has the value "a=b ~ domain=www.xyz.com", hence the whole cookie will be:

```
servercookie0 = a=b ~ domain=www.xyz.com
```

10 Note that the domain part of the servercookie0 is used purely by the intermediary server so that it knows which domain is setting the cookie. The second line calls the get_cookies function which takes its first argument (filled in by the intermediary server while the script was rewritten) and examines all servercookie0's cookies on the browser. It concatenates the first argument
15 together with any servercookieX cookies, and returns the result:

```
id1=sam; a=b
```

Note, this is the same result that would have been returned from the original page had it not been rewritten.

A third example with respect to the set_URL function and operation
20 1218 is as follows. The set_URL function operates to modify properties that cause a request. In this example, the script includes a script instruction

```
document.location = "http://www.xyz.com/foo.html";
```

which directs the browser to a new page. Such a script instruction can be replaced with

```
25      document.location = set_URL( "", "http://www.xyz.com/foo.html");
```

The set_URL function call takes two arguments. The first argument is filled in by the intermediary server while the script is being rewritten, and contains any parameters that would normally be provided in a suffix (e.g., "danainfo:") to follow a URL. It is not always needed, as will be explained below. The

second argument is the URL, though it could actually be a script expression (e.g., function call) that assembles or returns a URL.

The set_URL function examines the URL being set and rewrites it to be of a form that will direct the browser to the intermediary server. As noted above, the modification to URLs can be achieved with various techniques.

If the page is using the hostname modification technique, then relative URLs do not need to be modified since the hostname encodes the necessary information. If the URL is a full URL, then the set_URL function has all of the information it needs to convert the URL so that either (i) "danastreet.com" is included in the hostname of the URL (hostname modification technique such as for the HTTP case), or (ii) a suffix (e.g., ":danalInfo:host=xxx") is appended to the URL (the HTTPS case). Thus, if the page that the script appears on is using the hostname modification technique, the first argument is not needed by the set_URL function.

Alternatively, if the page upon which the script is present is using the URL suffix technique, then a relative URL that is passed to the set_URL function needs to have the same suffix applied to it. In this case, the intermediary server will insert as the first argument to the set_URL function any arguments that need to be passed in the suffix. For example, if the URL of the page is:

`https://secure.danastreet.com/quote/msft:danalInfo:host=www.xyz.com`

and a script instruction on the page includes:

```
document.location = "/quote/ibm";
```

then the rewritten script instruction would look like:

```
document.location = set_URL("Host=www.xyz.com", "/quote/ibm");
```

and the return result from the set_URL function would be:

```
/quote/ibm:danalInfo:host=www.xyz.com
```

which would result in a request from the browser for:

```
https://secure.danastreet.com/quote/ibm:danalInfo:host=www.xyz.com
```

Alternatively, if the script instruction were instead:

```
document.location = "https://www.abc.com/info/msft";
```

then the rewritten script instruction would look like:

```
document.location = set_URL("Host=www.xyz.com",  
5 "https://www.abc.com/info/msft");
```

and the return result from the set_URL function would be:

```
https://secure.danastreet.com/info/msft:danaInfo:host=www.abc.com
```

Note that, in this case, the first argument to the set_URL function is not
needed because the second argument is a full URL and contains all of the
10 information necessary to construct the final URL.

It should be noted that there are many functions or properties that
when written to can cause the browser to fetch a URL. Some examples
include:

```
window.open('url', ...)  
15 form.action = 'url';  
document.location = 'url';  
document.location.replace('url');  
image.src = 'url';
```

20 A fourth example with respect to the string substitution and operation
1222 is as follows. The string substitution operates to modify properties that
return a URL. Here, script instructions that read from a property that return a
URL are replaced with a constant string. In this example, if the script includes

```
var url = document.location;
```

25 such would be replaced by:

```
var url = "http://www.yahoo.com/foo.html";
```

This operation serves to ensure that any script examining its environment would not be confused by the fact that the actual URL of the page is different from what it expects. Note that there is more than one property that may need to be modified. Some examples of properties that can be so modified include:

document.location (returns full URL)

document.domain (returns just the hostname part of URL)

Although the above-described embodiments refer to the use of a single intermediary server within an information retrieval system, it should be recognized that the information retrieval system can also include a plurality of intermediary servers. The various intermediary servers can individually receive requests from client machines and forward them to the appropriate remote servers and return a response back through the intermediary server to the client machine. By having multiple servers, not only can additional processing power be obtained, but also load balancing and localization issues can be addressed. Load balancing can also be facilitated by more particularized secure request processing. For example, for popular (high traffic) websites such as trading.etrade.com, the secure hostname could be specified as "trading.etrade.com.danastreet.com" for the hostname modification approach to provide redirection to the intermediary server. For secure communications, authentication certificates are obtained for the hostnames so that a browser attempting such a secure connection does not alert the user of its absence. In this example then, a certificate for "trading.etrade.com.danastreet.com" would be obtained from a certification authority.

The various aspect of the invention described above can be used alone or in various combinations.

The invention is preferably implemented in software, but can be implemented in hardware or a combination of hardware and software. The

invention can also be embodied as computer readable code on a computer readable medium. The computer readable medium is any data storage device that can store data which can be thereafter be read by a computer system. Examples of the computer readable medium include read-only
5 memory, random-access memory, CD-ROMs, magnetic tape, optical data storage devices, carrier waves. The computer readable medium can also be distributed over a network coupled computer systems so that the computer readable code is stored and executed in a distributed fashion.

The advantages of the invention are numerous. Different
10 embodiments or implementations may yield one or more of the following advantages. One advantage of the invention is that script portions of markup language documents can be modified such that even markup language documents using scripts can be properly redirected to access resources on remote servers by way of an intermediary server is facilitated. Another
15 advantage of the invention is that both secure and unsecure requests can be handled. Still another advantage of the invention is that Universal Resource Locators (URLs), even those within scripts, of markup language documents can be modified.

The many features and advantages of the present invention are
20 apparent from the written description and, thus, it is intended by the appended claims to cover all such features and advantages of the invention. Further, since numerous modifications and changes will readily occur to those skilled in the art, it is not desired to limit the invention to the exact construction and operation as illustrated and described. Hence, all suitable modifications
25 and equivalents may be resorted to as falling within the scope of the invention.

What is claimed is:

CLAIMS

1. A method for inserting a toolbar into a webpage at a server machine,
5 said method comprising:
- receiving a webpage at the server machine to be delivered to a client machine;
- inserting the toolbar into the webpage at the server machine, the toolbar including at least one link to a resource and an executable script; and
10 delivering the webpage to the client machine.
2. A method as recited in claim 1, wherein the at least one link is a graphical link.
3. A method as recited in claim 1, wherein the executable script is an
15 activation script.
4. A method as recited in claim 3, wherein the activation script determines whether the toolbar is displayed in the webpage when the webpage is
20 displayed at the client machine.
5. A method as recited in claim 3, wherein the webpage has at least one frame,
- wherein an instance of the toolbar is inserted into each frame of the
25 webpage at the server machine.

6. A method as recited in claim 5, wherein, for each of the at least one instances of the toolbar, the activation script determines whether the toolbar is displayed in the at least one frame of the webpage when the webpage is displayed at the client machine.

5

7. A method as recited in claim 5, wherein, for each of the at least one instances of the toolbar, the activation script determines that the toolbar is to be displayed when the webpage is displayed at the client machine when both the activation script is within one of the at least one frame of the webpage and the size of the one of the at least one frame is greater than a threshold size.

10

8. A method as recited in claim 1, wherein the toolbar is a HTML toolbar, and wherein the executable script is provided in a script programming language.

15

9. A method as recited in claim 1, wherein the resource is a remote third-party resource.

20

10. A method as recited in claim 1, wherein the toolbar includes a plurality of links to different resources.

11. A method as recited in claim 1, wherein said method further comprising:

25

executing the executable script on the client machine to determine whether the toolbar should be displayed when displaying the webpage on the client machine.

12. A method for modifying a markup language page to include a dynamically determinable toolbar provided therein, said dynamically determinable toolbar operates when said markup language page is being displayed to dynamically determine whether said dynamically determinable toolbar should be displayed as part of said markup language page.

5

13. A method as recited in claim 12, wherein said dynamically determinable toolbar includes at least one link to a resource and an executable script.

10

14. A method as recited in claim 12, wherein the markup language page includes a least one frame,

wherein said dynamically determinable toolbar is provided within the at least one frame, and

15

wherein said dynamically determinable toolbar operates to display said dynamically determinable toolbar within the at least one frame when the size of the at least one frame is greater than a predetermined size and operates to not display said dynamically determinable toolbar within the at least one frame when the size of the at least one frame is not greater than the predetermined size.

20

15. A method as recited in claim 14, wherein said dynamically determinable toolbar includes at least one link to a remote resource and an executable script.

25

16. A method as recited in claim 14, wherein said dynamically determinable toolbar is a HTML toolbar, and wherein the executable script is provided in a script programming language.

17. A computer readable medium including at least computer program code for determining whether a toolbar should be display in one or more frames of a webpage, said computer readable medium comprising:

computer program code for determining whether the toolbar is within
5 the one or more frames of the webpage;

computer program code for determining the size of the one or more frames of the webpage; and

computer program code for displaying the toolbar in each of the one or more frames of the webpage in which the size of the one or more frames exceeds a threshold size and suppressing displaying the toolbar in each of
10 the one or more frames of the webpage in which the size of the one or more frames does not exceed the threshold size.

18. A computer readable medium as recited in claim 17, wherein the webpage and the toolbar are further provided on said computer readable
15 medium.

19. A computer readable medium including at least computer program code for inserting a toolbar into a webpage at a server machine, said
20 computer readable medium comprising:

computer program code for receiving a webpage at the server machine to be delivered to a client machine;

computer program code for inserting the toolbar into the webpage at the server machine, the toolbar including at least one link to a resource and
25 an executable script; and

computer program code for delivering the webpage to the client machine.

20. A computer readable medium as recited in claim 19, wherein the executable script determines whether the toolbar is displayed in the webpage when the webpage is displayed at the client machine.

- 5 21. A dynamically determinable toolbar, said dynamically determinable toolbar being provided in a markup language page, and said dynamically determinable toolbar operating, when the markup language page is being displayed, to dynamically determine whether said dynamically determinable toolbar should be displayed as part of the markup language page.

10

11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213
2214
2215
2216


DYNAMIC TOOLBAR FOR MARKUP LANGUAGE DOCUMENT

5

ABSTRACT OF THE DISCLOSURE

A toolbar that is provided or inserted in a markup language document so as to facilitate features or functionality provided by a server is disclosed. The toolbar is able to determine whether the toolbar should be displayed as part of the markup language page being displayed. In one embodiment the server is an intermediary server.

10

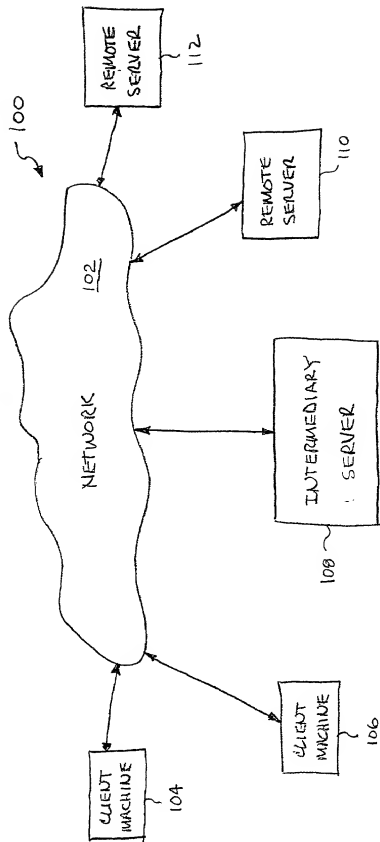

4/5

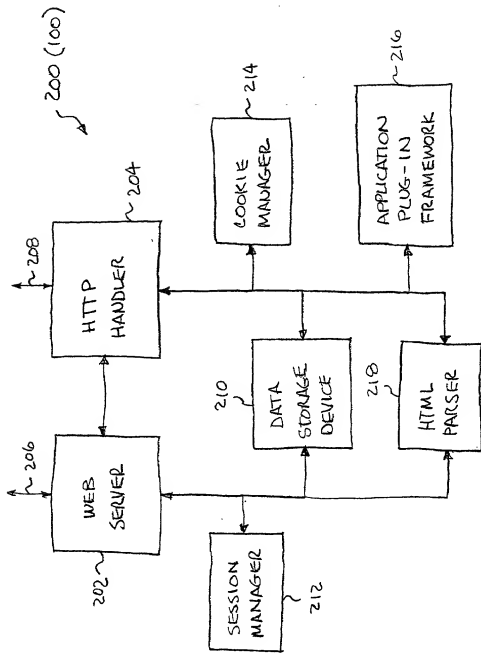


FIG. 2A

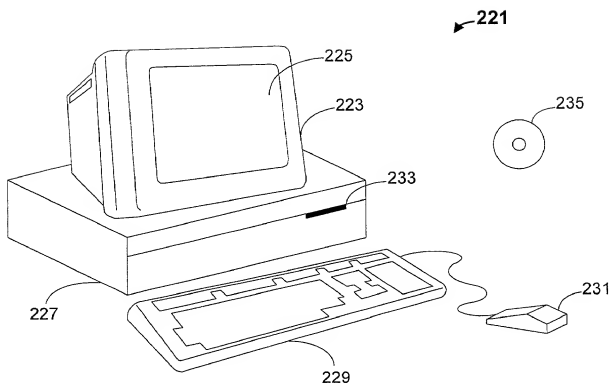


FIG. 2B

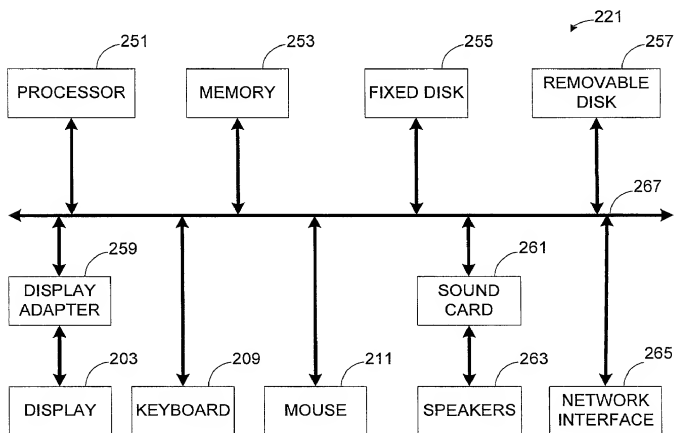


FIG. 2C

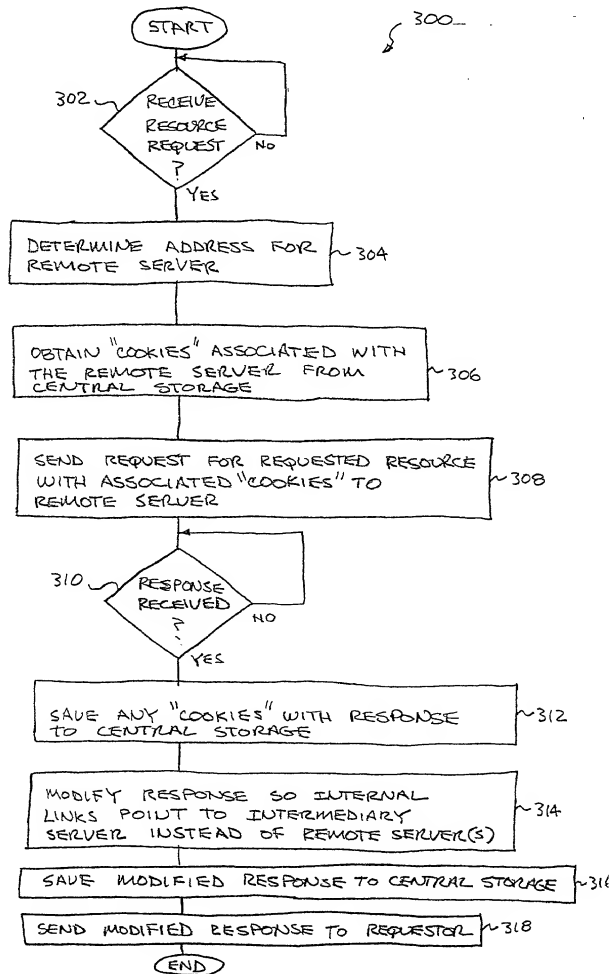
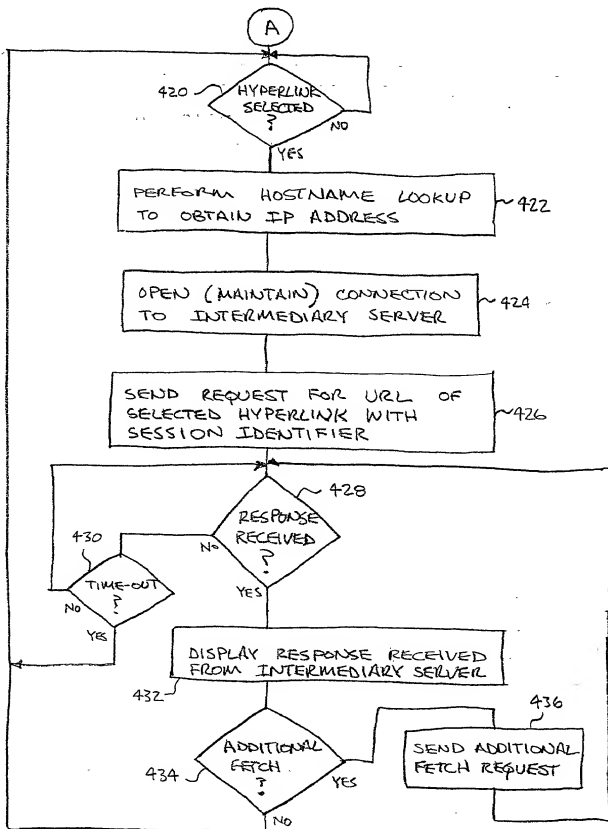


FIG.3



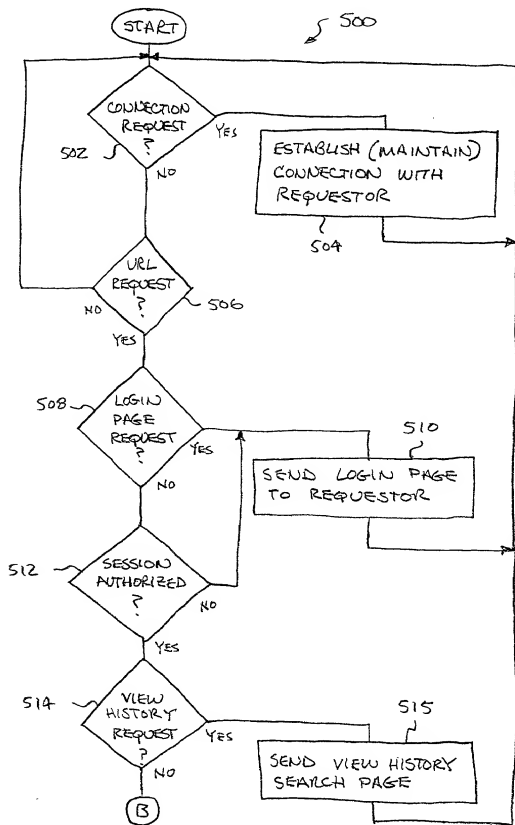


FIG. 5A

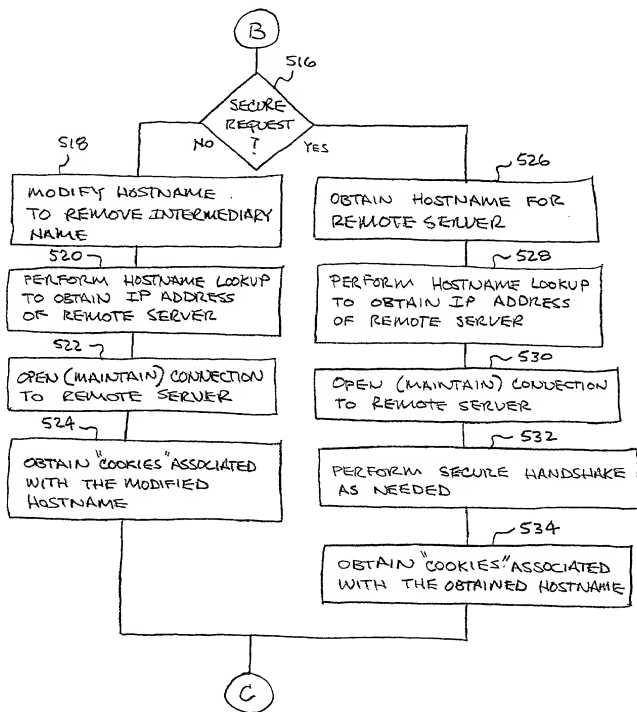
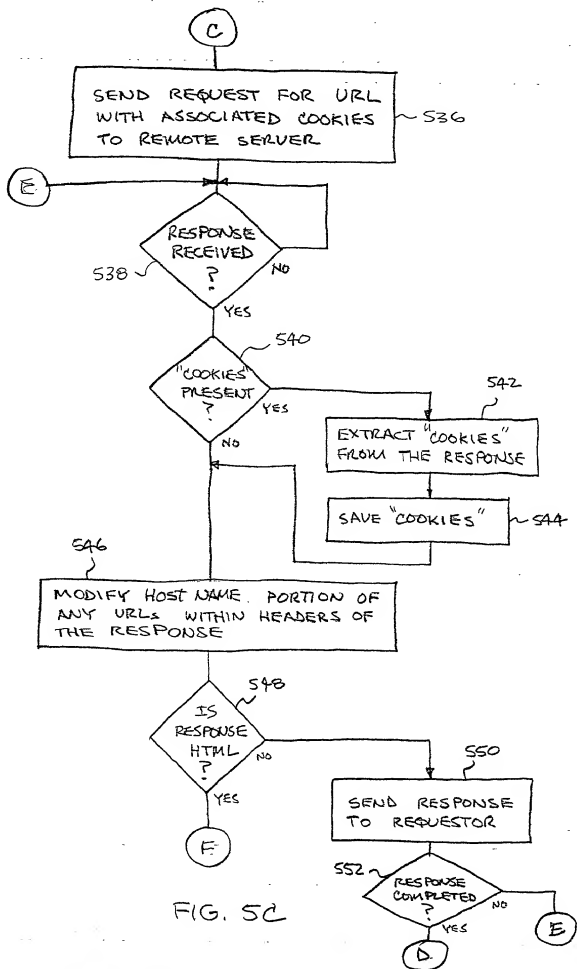


FIG. 5B



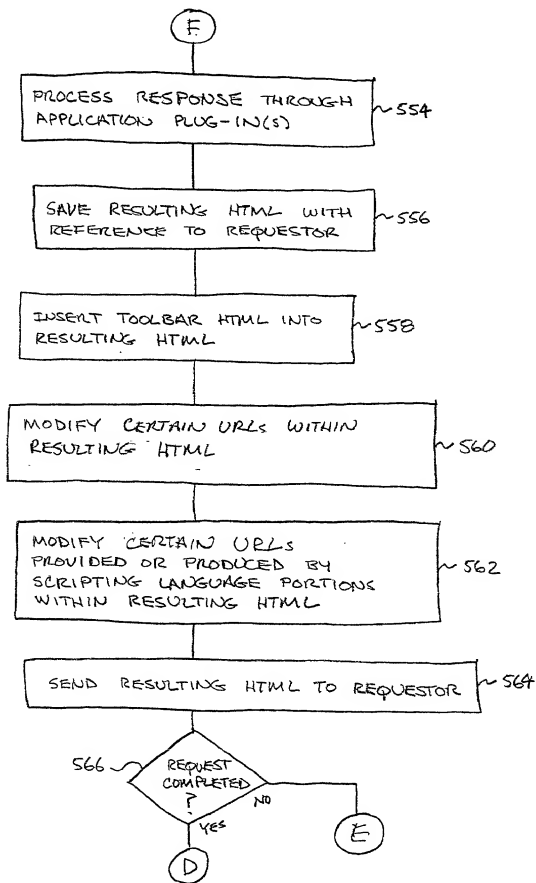


FIG. 5D

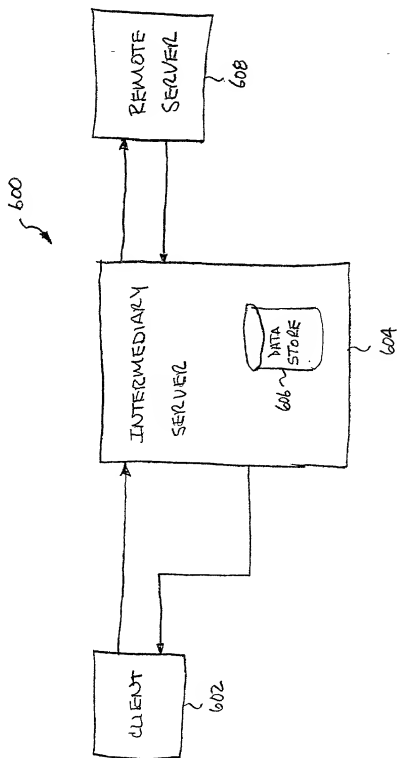


FIG. 6

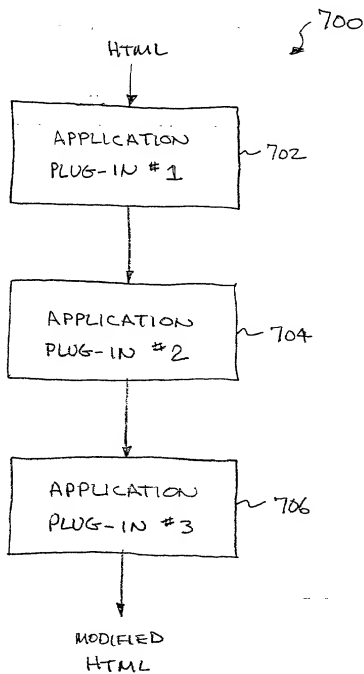


FIG. 7

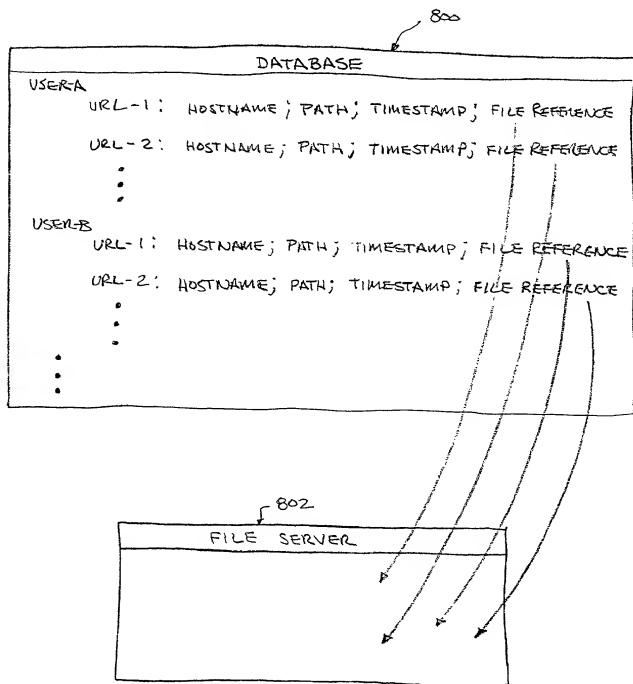


FIG. 8

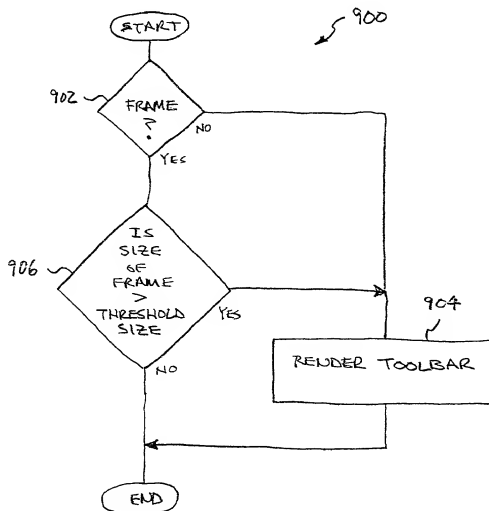


FIG. 9A

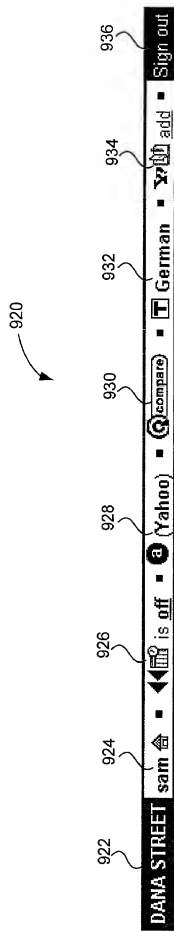
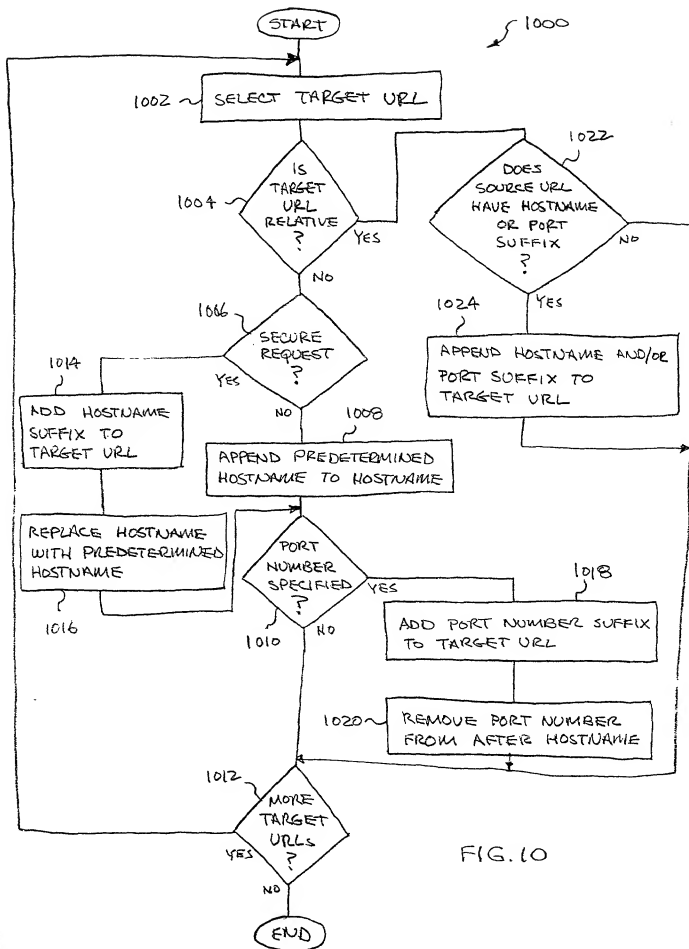


FIG. 9B



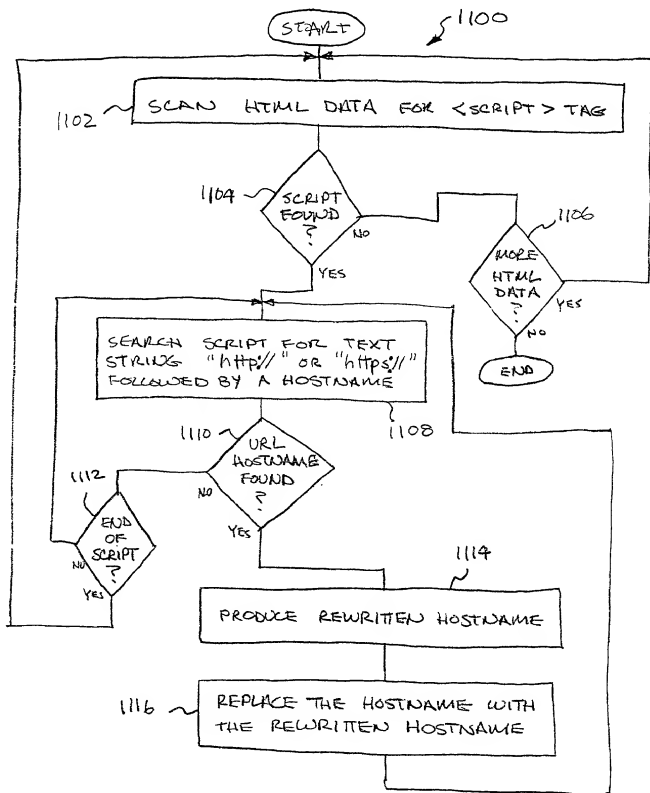


FIG. 11

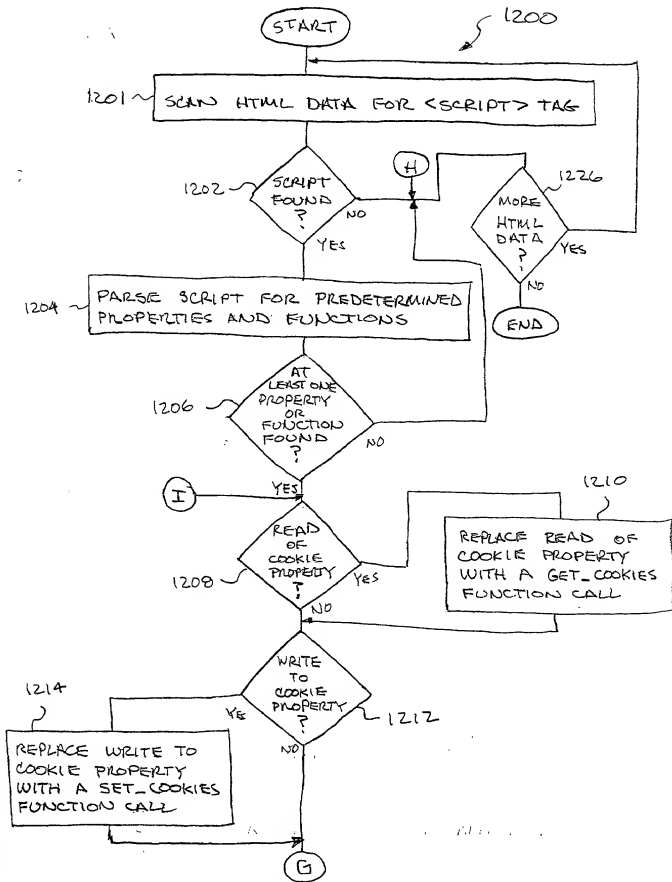


FIG. 12A

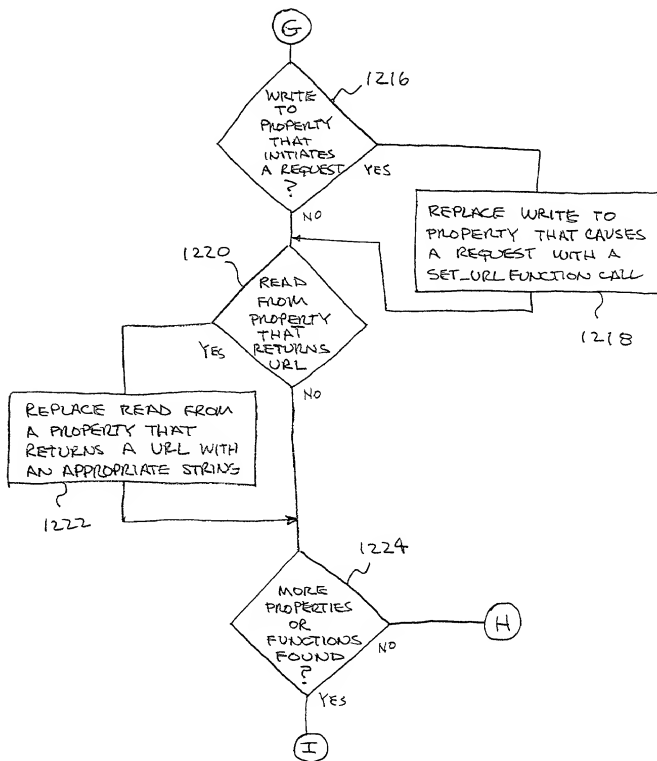


FIG. 12B

DECLARATION AND POWER OF ATTORNEY FOR ORIGINAL U.S. PATENT APPLICATION

Attorney's Docket No. DANAP004

As a below-named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: DYNAMIC TOOLBAR FOR MARKUP LANGUAGE DOCUMENT, the specification of which,

(check one)

1. ☒ is attached hereto.

2. ☐ was filed on _____ as
U.S. Application No. _____
and was amended on _____;

3. ☐ was filed on _____ as
International PCT Application No. _____
and was amended on _____;

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, CFR § 1.56.

Prior Foreign Application(s)

I hereby claim foreign priority benefits under Title 35, United States code, § 119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed:

			Priority Benefits Claimed?
_____ (Application No.)	_____ (Country)	_____ (Filing Date)	Yes ___ No ___
_____ (Application No.)	_____ (Country)	_____ (Filing Date)	Yes ___ No ___

Provisional Application(s)

I hereby claim the benefit under 35 U.S.C. § 119(e) of any United States provisional application(s) listed below:

60/235,513 (Application No.)	September 26, 2000 (Filing Date)
_____ (Application No.)	_____ (Filing Date)

Prior U.S. Application(s)

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s), or § 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

(Application No.) (Filing Date) (Status - patented, pending, abandoned)

(Application No.) (Filing Date) (Status - patented, pending, abandoned)

Power of Attorney

And I hereby appoint the law firm of **Beyer Weaver & Thomas, LLP** and all practitioners who are associated with the Customer Number 022434 as my principal attorneys to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith.

Direct Correspondence To:

Customer Number: 022434
BEYER WEAVER & THOMAS, LLP
P.O. Box 778
Berkeley, CA 94704-0778

**Direct Telephone Calls To:**

C. Douglass Thomas at telephone number (650) 961-8300

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Typewritten Full Name of

Sole or First Inventor: Sampath Srinivas

Citizenship: USA

Inventor's signature: *AS*

Date of Signature: 03 NOV 2000

Residence: (City) Santa Clara

(State/Country) CA/USA

Post Office Address: 3443 Georgetown Place, Santa Clara, CA 95051

Second Inventor: Theron Tock

Citizenship: USA

Inventor's signature: *Theron Tock*

Date of Signature: 03 NOV 2000

Residence: (City) Mountain View

(State/Country) CA/USA

Post Office Address: 620 Palo Alto Avenue, Mountain View, CA 94041